



## PRODUCT SPECIFICATION

### GENERAL

|                                  |                         |                        |  |
|----------------------------------|-------------------------|------------------------|--|
| <b>FINISH:</b>                   | Polished Chrome         | <b>CABLE LENGTH:</b>   | Not Applicable                               |
| <b>MAIN MATERIAL:</b>            | Metal - Mild Steel      | <b>GROSS WEIGHT:</b>   | 1.0 (kg)                                     |
| <b>DIMENSIONS:</b>               | H:50mm W:350mm D:180mm  | <b>CLASS:</b>          | CE (Class I)                                 |
| <b>INSTALLATION ORIENTATION:</b> | Wall Mount - Horizontal | <b>IP RATING:</b>      | IP20   |
| <b>CUT OUT HOLE:</b>             | Not Applicable          | <b>BATHROOM ZONE:</b>  | Zone 3                                       |
| <b>RECESS DEPTH:</b>             | Not Applicable          | <b>VOLTAGE:</b>        | Mains 230Vt                                  |
| <b>FIRE RATING:</b>              | Not Applicable          | <b>PRODUCT F MARK:</b> | Suitable for mounting on flammable materials |


### LAMP

|                             |                |                                   |                |
|-----------------------------|----------------|-----------------------------------|----------------|
| <b>LIGHT SOURCE:</b>        | G4             | <b>MACADAM ELIPSE:</b>            | Not Applicable |
| <b>MAXIMUM WATTAGE:</b>     | 2 x 20W Max    | <b>UGR:</b>                       | Not Applicable |
| <b>MAXIMUM LAMP LENGTH:</b> | 30mm/1.18"     | <b>BEAM ANGLE:</b>                | Not Applicable |
| <b>LAMP INCLUDED?</b>       | Yes            | <b>TILT ADJUSTMENT ANGLE:</b>     | Not Applicable |
| <b>LUMINOUS FLUX:</b>       | 182.8 (lm)     | <b>ROTATION ADJUSTMENT ANGLE:</b> | Not Applicable |
| <b>COLOUR TEMP:</b>         | 2800 (K)       | <b>AVERAGE LIFESPAN:</b>          | 2,000          |
| <b>CRI:</b>                 | 100            | <b>L70:</b>                       | Not Applicable |
| <b>R9:</b>                  | Lamp Dependent |                                   |                |

### ELECTRICAL

|                               |                |                                 |                |
|-------------------------------|----------------|---------------------------------|----------------|
| <b>SWITCHED:</b>              | No             | <b>SUPPLY FREQUENCY:</b>        | 50/60 (Hz)     |
| <b>DIMMABLE:</b>              | Yes            | <b>DRIVER/BALLAST VOLTAGE:</b>  | 220 - 240 (V)  |
| <b>DIMMING METHOD:</b>        | Lamp Dependent | <b>DRIVER AVERAGE LIFESPAN:</b> | Not Applicable |
| <b>DRIVER OUTPUT CURRENT:</b> | Not Applicable | <b>EFFICACY:</b>                | 4.2 (lm/W)     |
| <b>DRIVER OUTPUT VOLTAGE:</b> | 12 (V)         | <b>DRIVER/BALLAST INCLUDED?</b> | Yes (Integral) |



## ADDITIONAL INFORMATION





BOX QUANTITY X8

# PRODUCT ELEVATIONS

---

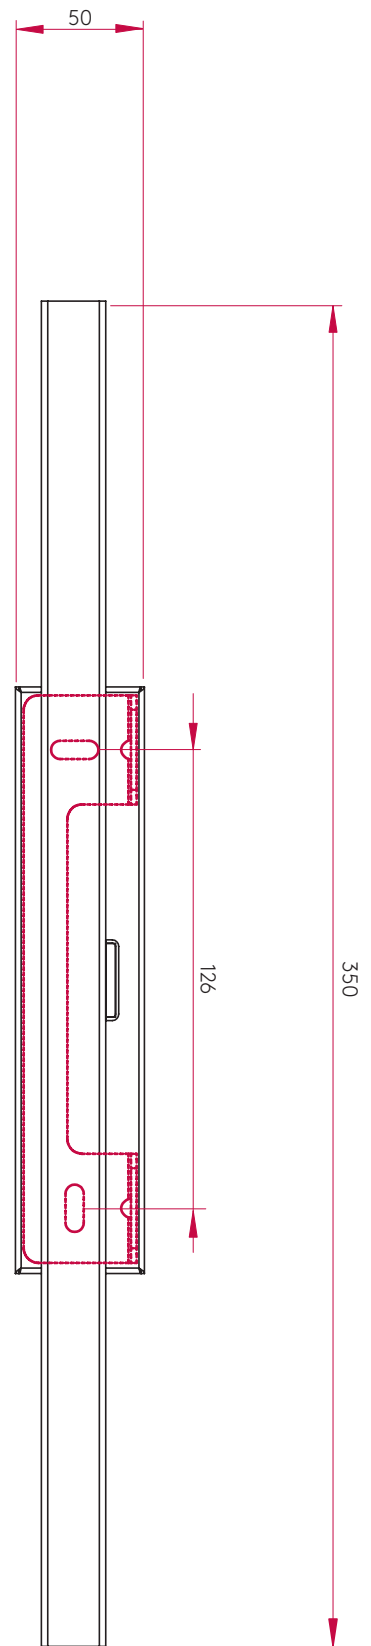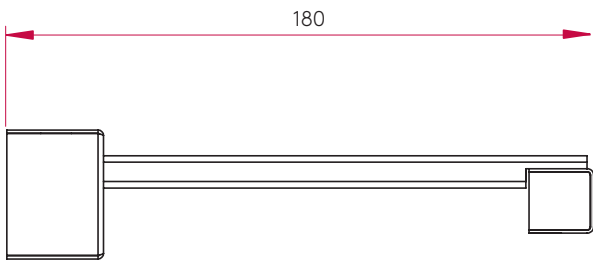

## LUX DISTRIBUTION DIAGRAM

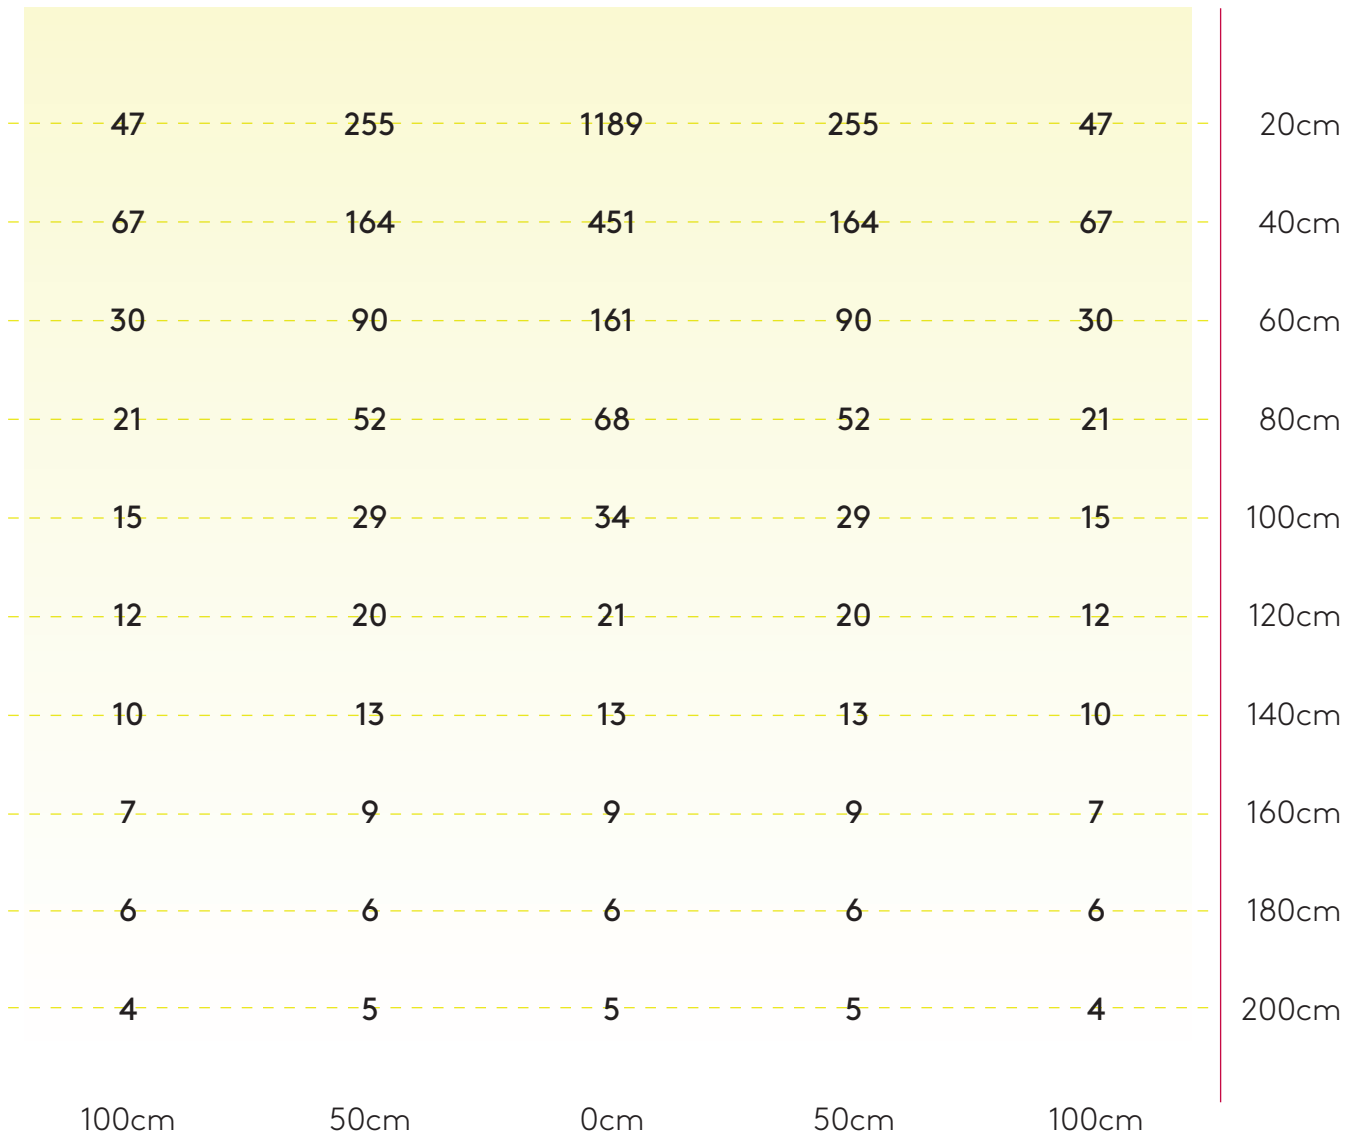

## ADDITIONAL INFORMATION



All products tested were mounted 2m from the floor and adjustable heads set perpendicular to the ground. Results were obtained using a handheld lumen meter, measurements given are in Lux.

**Please note:** Graphical representation of the product is not to scale.